

Product data sheet

Characteristics

Cellular Connected ESP32

SC-G2 Series



Features

- ▶ ESP32-WROOM32 Module
- ▶ GSM / LTE Connection
- ▶ Built-in 0.96 OLED Display
- ▶ Built-in Button on front panel
- ▶ Digital Inputs
- ▶ Analog Inputs
- ▶ Transistor Outputs
- ▶ DIN-Rail mount



Cellular Options

Quectel EC21

- ▶ Worldwide LTE, UMTS/HSPA(+) and GSM/GPRS/EDGE coverage
- ▶ Supports DFOTA and DTMF

SIMCOM SIM800-C

- ▶ Quad-band GSM/GPRS module
- ▶ DTMF, MMS, MUX
- ▶ Embedded TCP/UDP protocols

Expansions supported

Temperature
MAX31856



Analog
4-20mA / 0 - 10V



Main

| | | |
|--------------------------|--|--|
| Range of product | Industrial Controller GSM+WiFi+Ethernet | |
| Product type | Programmable Controller | |
| Certifications | EN 61131-2:2007 EN 61010-1:2010+A1:2019 EN IEC 61010-2-201:2018 | 2014/30/EU- Electromagnetic Compatibility (EMC) Annex III, Part B, Module C |
| Rated supply voltage | 24V DC | |
| Communication | WiFi / Bluetooth GSM / GPRS - SIMCOM SIM800C LTE / EDGE - Quectel EC21 | |
| OLED Display protocol | I2C | |
| Analog input range | 4 - 20mA / 0 - 10V | |
| Analog input resolution | 16 bit | |
| Transistor Output Rating | 500mA 300mW | |

Product data sheet

Characteristics

Cellular Connected ESP32

SC-G2 Series



Complementary

| | |
|-----------------------------|---|
| Number of Expansions | ----- |
| Supply voltage limits | 20.4.....28.8V |
| Inrush current | <=50A |
| Power consumption in W | 32.6.....40.4 with all outputs ON |
| Discrete logic input | Sink or source |
| Discrete input voltage | 24V |
| Discrete input voltage type | DC |
| Voltage state 1 guaranteed | >=15 V for input |
| Voltage state 0 guaranteed | <=5 V for input |
| Discrete input current | 5 mA for input |
| Input impedance | 4.7k Ohm for input |
| Memory capacity | Refer datasheet of ESP32-WROOM32 |
| Battery type | ----- |
| Backup time | ----- |
| Local signalling | 1 LED green for PWR |
| Electrical connection | Removable screw terminal block for inputs and outputs (pitch 5.08 mm) |
| Mounting support | Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 rail conforming to IEC 60715 Plate or panel with fixing kit |
| Height | 90.50 mm |
| Depth | 56.60 mm |
| Width | 60.60 mm |
| Product weight | 0.43 Kg |

Environment

| | |
|---------------------------------------|--|
| Resistance to electrostatic discharge | 4kV on contact 8kV on air |
| Resistance to electro magnetic fields | 10 V/m (80 MHz 1GHz) 3 V/m (1.4 MHz 2 GHz) 1 V/m (2 MHz 3 GHz) |
| Immunity to microbreaks | 10 ms |
| Relative humidity | 10....95% without condensation in operation |
| IP degree of protection | IP20 |
| Operating temperature | -10 ... +85° C (14...185 °F) |
| Storage Temperature | -25 ... +85° C (-13...185 ° F) |
| Operating altitude | 0...2000m |
| Storage altitude | 0...3000m |
| Shock resistance | 15 gn for 11 ms |

Product data sheet

Characteristics

Cellular Connected ESP32


SC-G2 Series



Digital inputs wiring diagram

SC-G2

24VDC Sink/Source

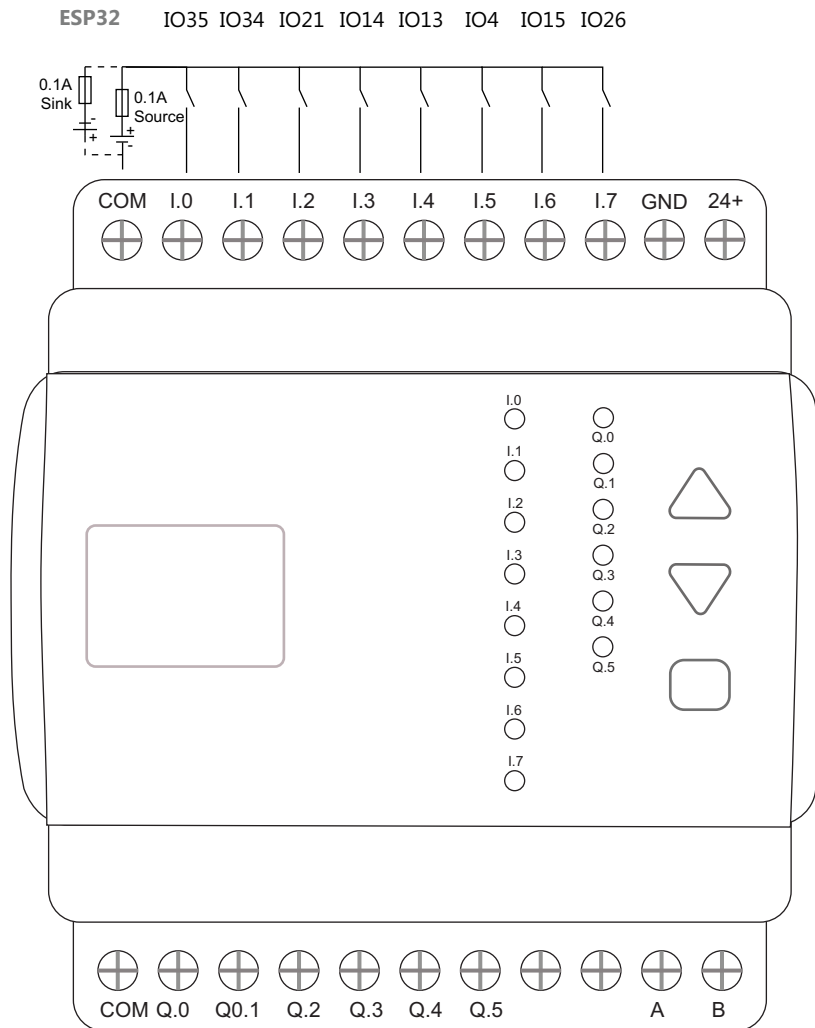

Product data sheet

Characterstics


Cellular Connected ESP32

SC-G2 Series




Analog input wiring diagram (0-10V)

***G2 / G3 Models Only**

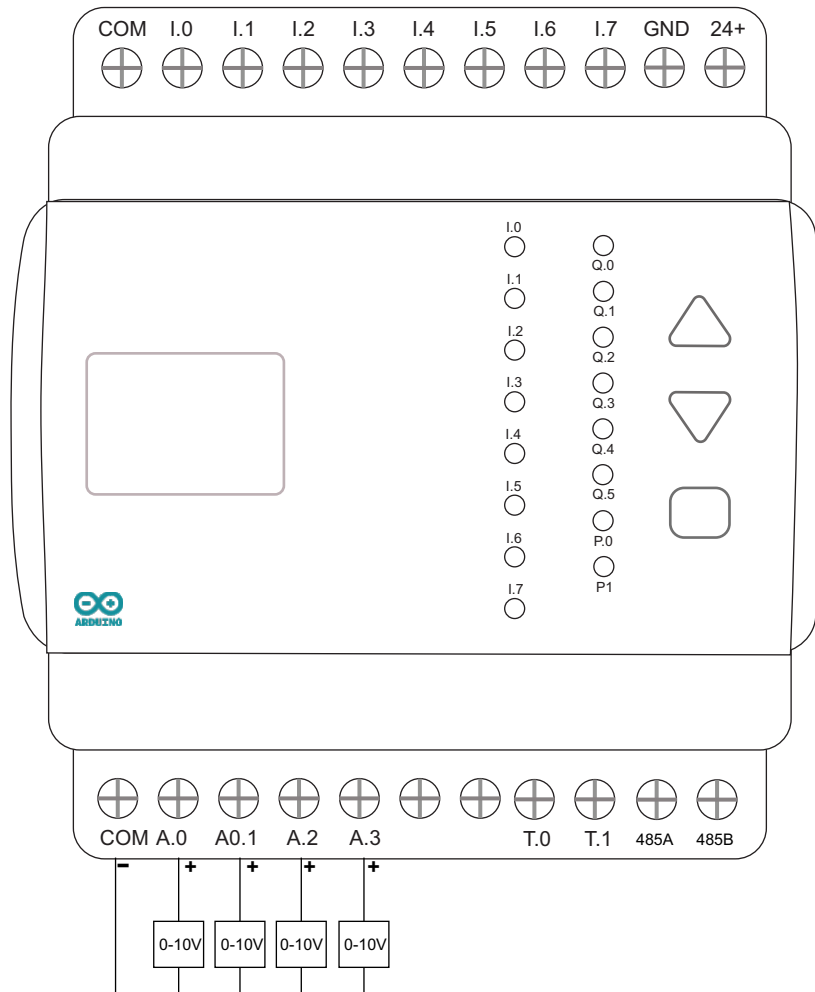

0 - 10 V input to 0 - 4V

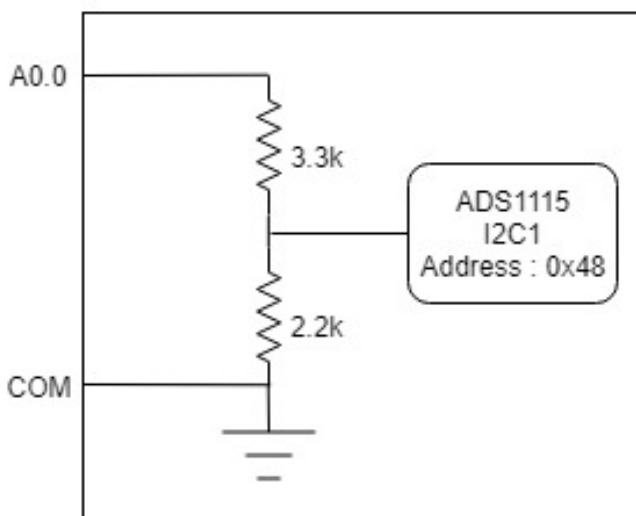

ADS1115 connections

| | |
|----------------|-----------------|
| IC Type | ADS 1115 |
| Communication | I2C IO16 - IO17 |
| Module Address | 0x48 / 0x49 |
| Resolution | 16 bit |

Product data sheet

Characterstics


Cellular Connected ESP32

SC-G2 Series



Analog input wiring diagram (4-20mA)


*G2 / G3 Models Only

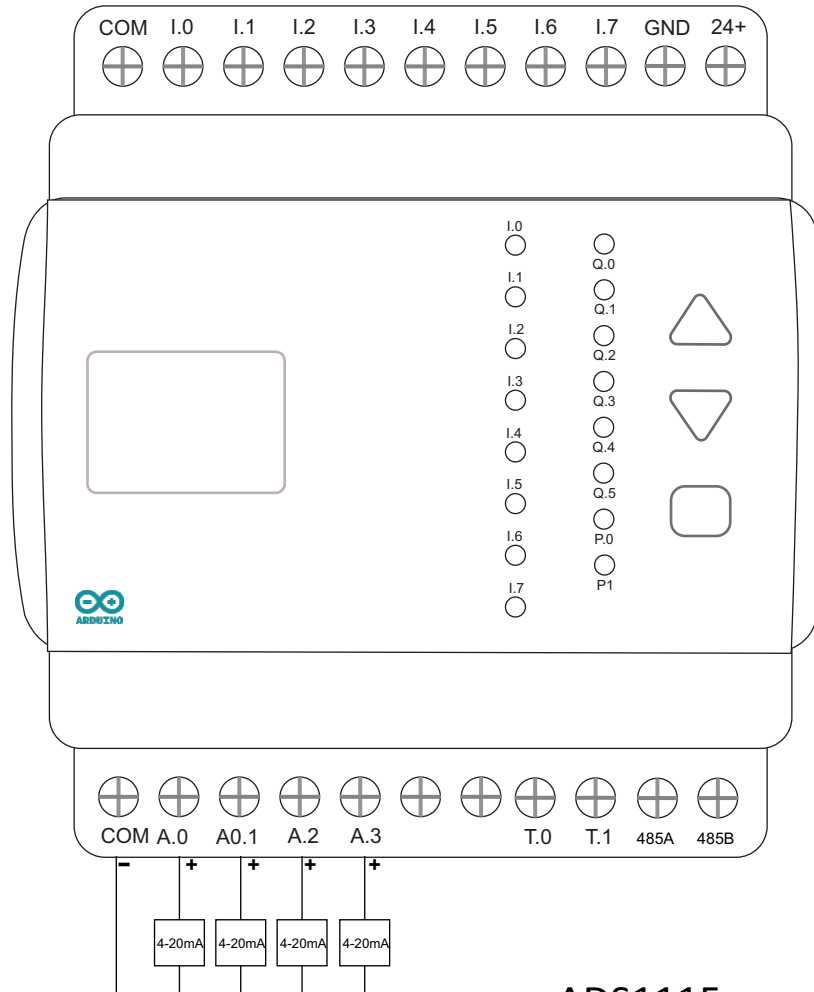

ADS1115 connections

| | |
|----------------|-----------------|
| IC Type | ADS 1115 |
| Communication | I2C IO16 - IO17 |
| Module Address | 0x48 / 0x49 |
| Resolution | 16 bit |

0 - 10 V input to 0 - 4V

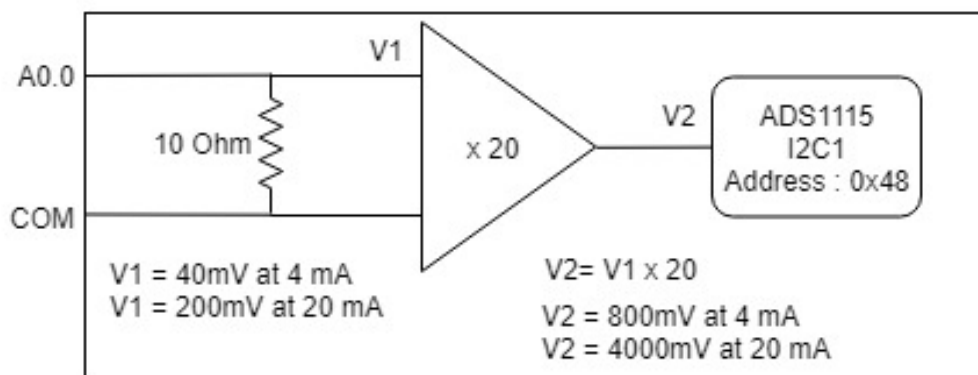

Product data sheet

Characteristics



Cellular Connected ESP32

SC-G2 Series



Transistor outputs wiring diagram

SC-G2

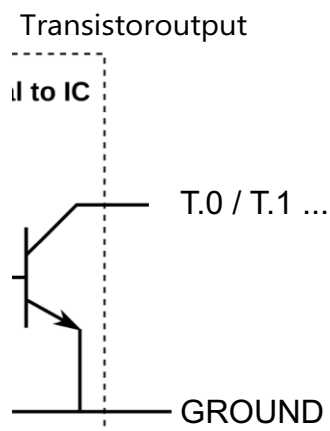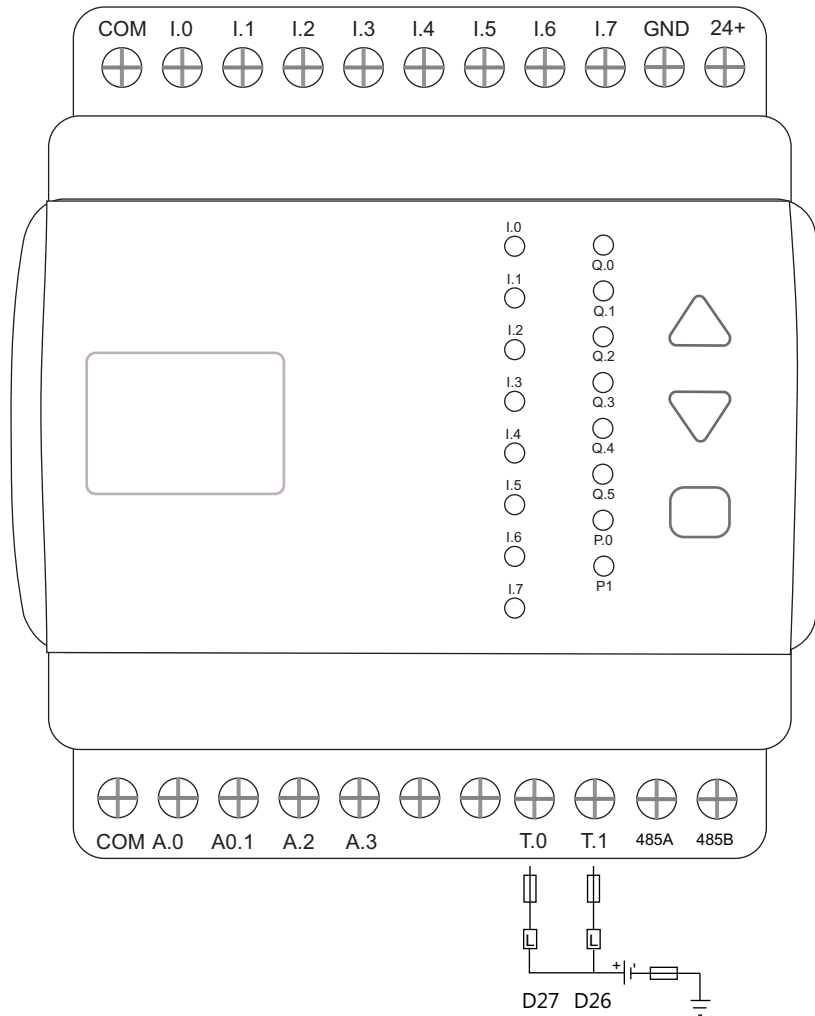

Product data sheet

Characterstics

Cellular Connected ESP32

SC-G2 Series



GPIO MAP

| GPIO ALLOCATION | | |
|-----------------|---------------------------------------|-------------------|
| GPIO | | I IOT-AE02 SERIES |
| 0 | outputs PWM signal at boot | |
| 1 | debug output at boot | |
| 2 | connected to on-board LED | OUTPUT 7 |
| 3 | HIGH at boot | |
| 4 | | INPUT 6 |
| 5 | outputs PWM signal at boot | |
| 6 | connected to the integrated SPI flash | |
| 7 | connected to the integrated SPI flash | |
| 8 | connected to the integrated SPI flash | |
| 9 | connected to the integrated SPI flash | |
| 10 | connected to the integrated SPI flash | |
| 11 | connected to the integrated SPI flash | |
| 12 | boot fail if pulled high | |
| 13 | | INPUT 5 |
| 14 | outputs PWM signal at boot | INPUT 4 |
| 15 | outputs PWM signal at boot | INPUT 7 |
| 16 | | SDA |
| 17 | | SCL |
| 18 | | |
| 19 | | RS-485 TX |
| 21 | | INPUT 3 |
| 22 | | RS-485 FC |
| 23 | | |
| 25 | | RS-485 RX |
| 26 | | OUTPUT 2 |
| 27 | | OUTPUT 1 |
| 32 | | GSM RX |
| 33 | | GSM TX |
| 34 | input only | INPUT 2 |
| 35 | input only | INPUT 1 |
| 36 | input only | BUTTON INPUT |
| 39 | input only | |

Product data sheet

Characterstics

Cellular Connected ESP32

SC-G2 Series



0.96 OLED Display parameters



| | |
|----------------|---------------------------|
| Display driver | SSD1306 |
| Communication | I2C IO16(SDA) - IO17(SCL) |
| Module Address | 0x3C |
| Resolution | 128 x 64 |

GSM Connection

| | |
|----------------|--------------------------------|
| Display driver | SIM800C |
| Communication | UART |
| Baud Rate | Configurable / 9600bps Default |
| Connection | RXD IO32 TXD IO33 |

Built in but ons

| | |
|-----------|------------------------------------|
| Read mode | ADC (Analog to Digital Conversion) |
| Analog IO | GPIO 36 / SENSOR_VP |

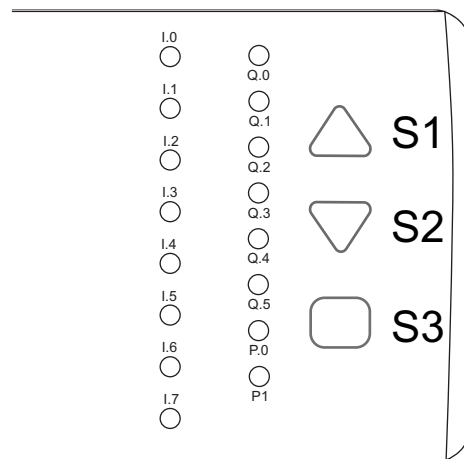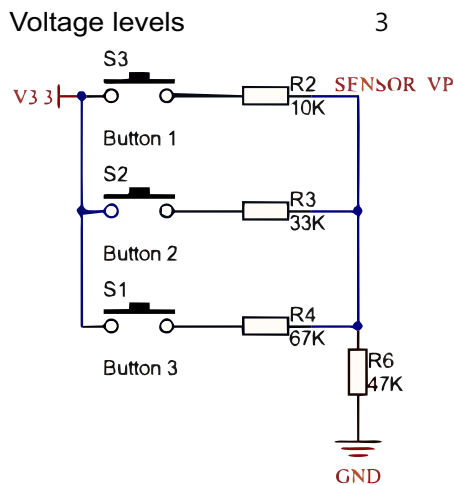

Product data sheet


Characterstics

Cellular Connected ESP32


SC-G2 Series



Expansion port

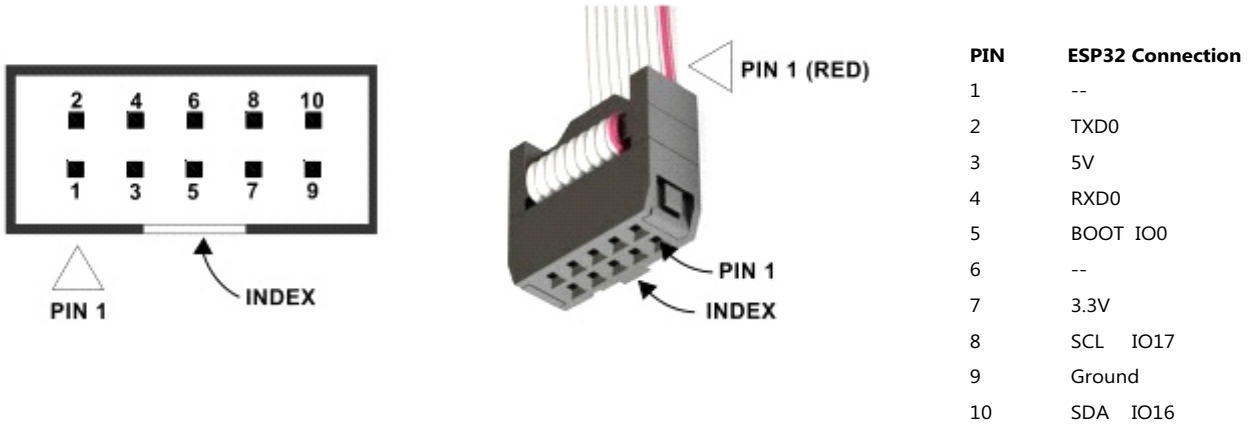

Expansion modules

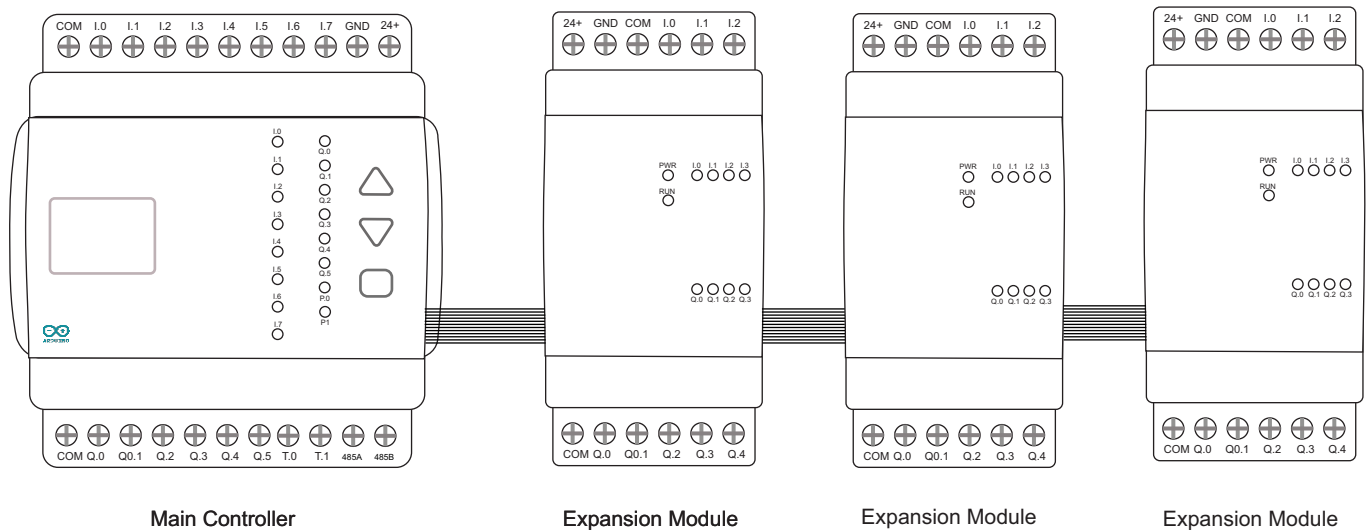

Expansion modules connects to the right side of the controller

Upto 6 expansion modules can be connected on one controller

Expansion modules use I2C, UART and GPIO on the expansion port

Depending on the model, some expansion modules require external power



Product data sheet


Characterstics

Cellular Connected ESP32

SC-G2 Series




Programming procedure

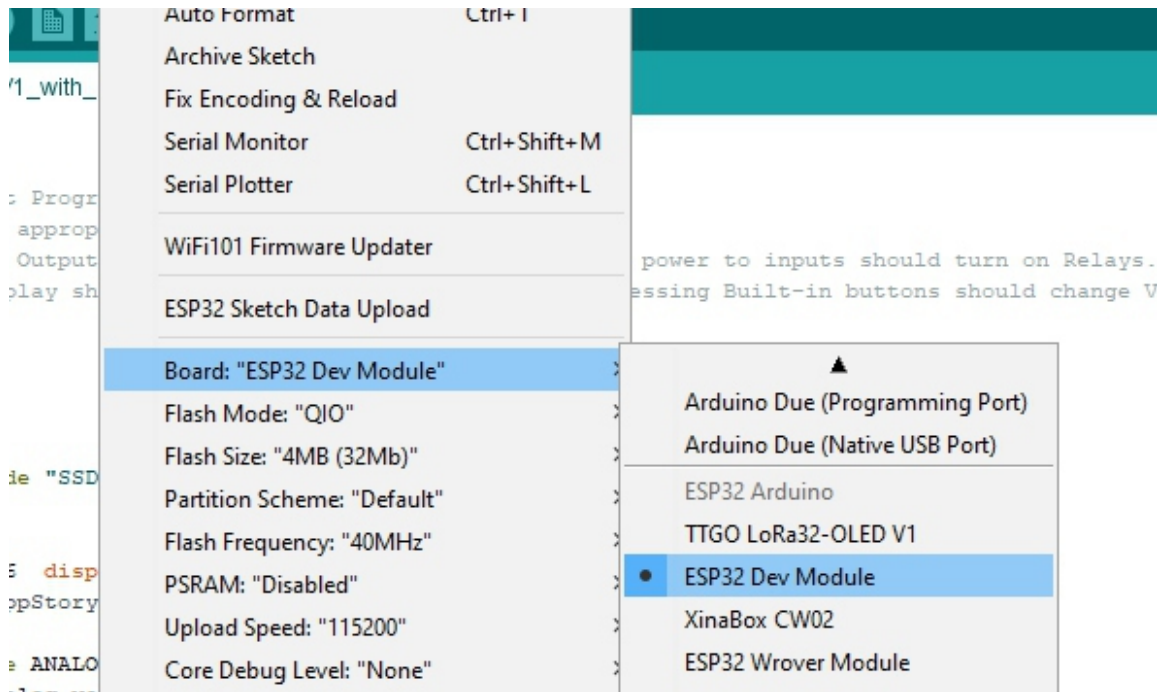

| | |
|-----------------|------------------|
| Board | ESP32 Dev Module |
| Flash Mode | QIO |
| Flash Size | 4MB |
| Flash Frequency | 10MHz |
| PSRAM | Disabled |
| Upload Speed | 115200 |

After successful uploading of program following message appears.

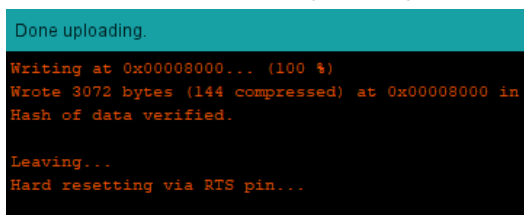

esp32 Boards must be installed under board manager, it is recommended to use the latest version of esp32 board driver for Arduino.

Due to installation of different drivers and older versions of libraries, Arduino fails to upload the program to the controller. In most cases it is due to failure to enter boot mode of the device. The device can be forced to boot mode by connecting the BOOT IO0 of the expansion port to the GND pin with a jumper wire. Arduino is able to upload the program to controller while the controller is in boot mode. After uploading the program , the connection between the BOOT IO0 and GND must be removed to run the uploaded program.

Product data sheet

Characteristics

Cellular Connected ESP32

SC-G2 Series



Reach-Us

Technical Support

E-mail : support@sensoper.com

Sales Inquiries

E-mail : sales@sensoper.com

Web : <https://www.sensoper.com/support/>

Order Online

<https://www.sensoper.com>